

FOOD  
GRADE

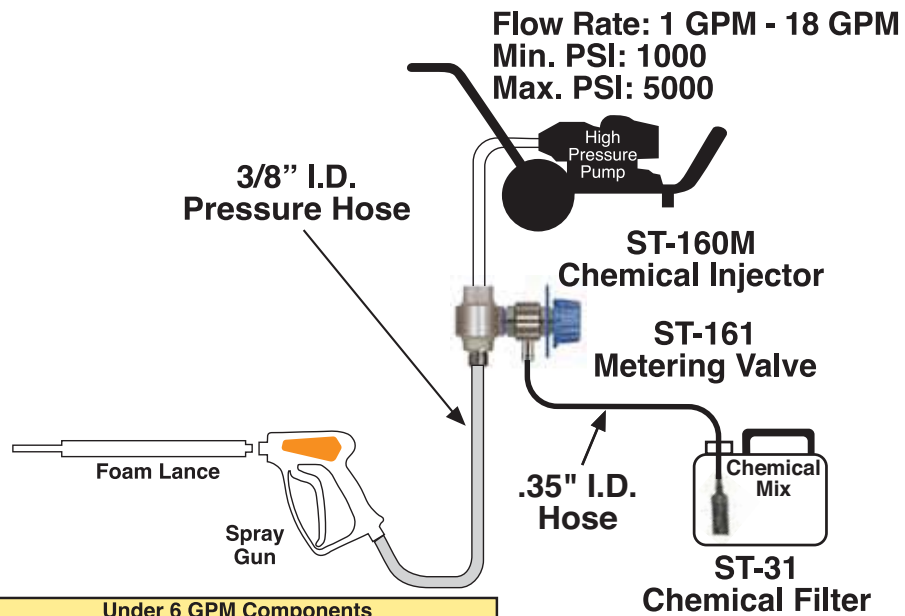
Easy to read dial

**ST-160M CHEMICAL INJECTOR** *(single chemical)*

With ST-161 Metering/Dosing Valve

ORDER #	PRESSURE	TEMP.	INLET	OUTLET	NOZZLE/ ORIFICE	WEIGHT
200160600	5000 PSI	194° F	3/8" F	3/8" M	3.0	1.25 lb
200160601	5000 PSI	194° F	3/8" F	3/8" M	3.5	1.25 lb
200160602	5000 PSI	194° F	3/8" F	3/8" M	4.0	1.25 lb
200160603	5000 PSI	194° F	3/8" F	3/8" M	4.5	1.25 lb
200160604	5000 PSI	194° F	3/8" F	3/8" M	5.5	1.25 lb
200160605	5000 PSI	194° F	3/8" F	3/8" M	6.0	1.25 lb
200160606	5000 PSI	194° F	3/8" F	3/8" M	7.0	1.25 lb
200160607	5000 PSI	194° F	3/8" F	3/8" M	8.0	1.25 lb
200160608	5000 PSI	194° F	3/8" F	3/8" M	8.5	1.25 lb
200160609	5000 PSI	194° F	3/8" F	3/8" M	9.0	1.25 lb
200160610	5000 PSI	194° F	3/8" F	3/8" M	10.0	1.25 lb
200160611	5000 PSI	194° F	3/8" F	3/8" M	11.0	1.25 lb
200160612	5000 PSI	194° F	3/8" F	3/8" M	12.0	1.25 lb
200160613	5000 PSI	194° F	3/8" F	3/8" M	12.5	1.25 lb

- Conserves chemicals.
- Locks in position for accurate metering.
- Multiple metering positions.
- Min/Max Flow Rate: 1/18 GPM
- Min. PSI: 1000
- Hose Barb: .35"

**ST-160M System Diagram****Under 6 GPM Components****Over 6 GPM Components****FOOD GRADE****FOOD GRADE**