
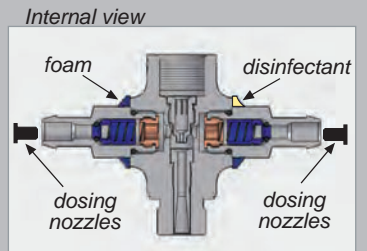


## ST-166 DUAL CHEMICAL INJECTOR (stainless steel)

Use for chemical & foam applications.

ORDER #	PRESSURE	TEMP.	INLET	OUTLET	NOZZLE / ORIFICE	WEIGHT
200166499	5000 PSI	194° F	3/8" F	3/8" M	3.0	.75 lb
200166500	5000 PSI	194° F	3/8" F	3/8" M	3.5	.75 lb
200166505	5000 PSI	194° F	3/8" F	3/8" M	4.0	.75 lb
200166510	5000 PSI	194° F	3/8" F	3/8" M	4.5	.75 lb
200166515	5000 PSI	194° F	3/8" F	3/8" M	5.5	.75 lb
200166520	5000 PSI	194° F	3/8" F	3/8" M	6.0	.75 lb
200166525	5000 PSI	194° F	3/8" F	3/8" M	7.0	.75 lb
200166530	5000 PSI	194° F	3/8" F	3/8" M	8.0	.75 lb
200166535	5000 PSI	194° F	3/8" F	3/8" M	8.5	.75 lb
200166540	5000 PSI	194° F	3/8" F	3/8" M	9.0	.75 lb
200166545	5000 PSI	194° F	3/8" F	3/8" M	10.0	.75 lb
200166550	5000 PSI	194° F	3/8" F	3/8" M	11.0	.75 lb
200166555	5000 PSI	194° F	3/8" F	3/8" M	12.0	.75 lb
200166560	5000 PSI	194° F	3/8" F	3/8" M	12.5	.75 lb

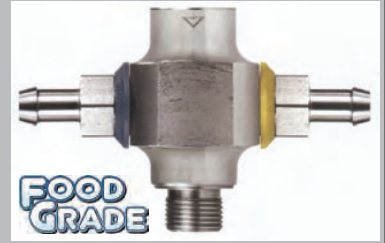

- Designed to inject and mix 2 chemicals simultaneously.
- Durable stainless steel.
- 18 dosing nozzles to control chemical suction included. (see page 121 for dilution ratios)
- Hose Barb: .35"

### ST-166 System Diagram

