

# GAS-FLO 3/8" NATURAL GAS / PROPANE GAS OUTLETS (NGO-3)

## Applications:



Overall Dimensions of NGO-3 OUTLET COVER measures:  
 6-1/4" H x 3-1/2" W x 2-1/2" D



NGO-3HT

**GAS-FLO**  
 Retail packaging available.


## PART No.: NGO-3 (Stainless Steel Cover)

- STAINLESS STEEL OUTLET COVER.
- 3/8 C.S.A. CONVENIENCE OUTLET (VALVE WITH COUPLER).
- GAS-ON LOCKING DEVICE\*
- APPLIANCE ATTACHMENT (NIPPLE).
- OUTLET DUST PLUG.



**THERMAL PROTECTION DEVICE SHUTS OFF FLOW OF GAS AT +250°F, +121°C**

- Natural Gas CSA Rated 80,000 BTU/H @ 0.5 PSIG with 0.6" wc pressure drop.
- Propane Gas CSA Rated 125,000 BTU/H @ 0.6" wc pressure drop.

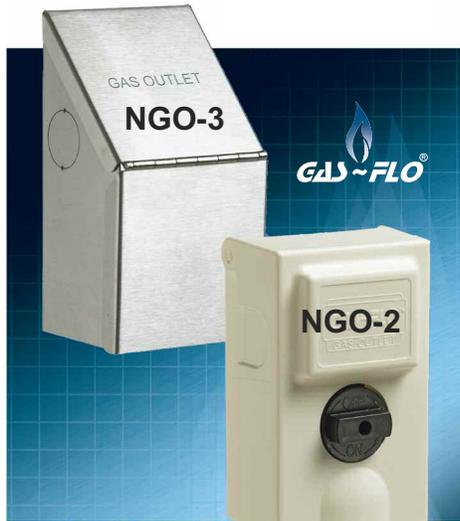

### SAFETY FEATURE

**\* Connect / Disconnect are Denied While Gas is Flowing.**



Q.D. Sleeve Can't Move When Handle In On Position

PART No.	Description
NGO-3	Gas Outlet with Stainless Cover
NGO-3HT	Stainless - With Hanger Tab Rack Package
NGO-3W	Stainless - With White Painted Cover

PART No.	Description
NG-OUTLET-NCN	Gas Outlet with Stainless Cover (No Coupler or Nipple)

**THERMAL PROTECTION DEVICE SHUTS OFF FLOW OF GAS AT +250°F, +121°C**



Hose Assembly Length Restrictions May Apply: Check with Local Jurisdictions

- Natural Gas CSA Rated 80,000 BTU/H @ 0.5 PSIG with 0.6" wc pressure drop.
- Propane Gas CSA Rated 125,000 BTU/H @ 0.6" wc pressure drop.

PART No.	Description
NGO-2	Gas Outlet with White ABS Housing
NGO-2HT	White - With Hanger Tab Rack Package

**Gas Hose Assemblies Sold Separately**

**CAUTION: Gas Outlets are to be installed by Licensed Gas fitters only.**